

L850F-09-55 (LN850F-09-55) Oval type Infrared LED

L850F-09-55 is an AlGaAs LED mounted on a lead frame with a clear oval type epoxy lens.

On forward bias, it emits a spectral band of radiation which peaks at 850nm. These devices are intended to be operated at pulsed current of 1A under maximum 4.0V for stable long life.


◆ Features

- 1) high power and low forward voltage
- 2) different axis of emission at latitude and longitude

◆ Specifications

- | | |
|---------------------|--------------------|
| 1) Product Name | Infrared LED Lamp |
| 2) Type No. | L850F-09-55 |
| 3) Chip | |
| (1) Chip Material | AlGaAs |
| (2) Chip Dimension | 550umx550um |
| (3) Peak Wavelength | 850nm typ. |
| 4) Package | |
| (1) Type | Φ5mm clear molding |
| (2) Resin Material | Epoxy Resin |
| (3) Lead Frame | Soldered |

◆ Outer dimension (Unit: mm)

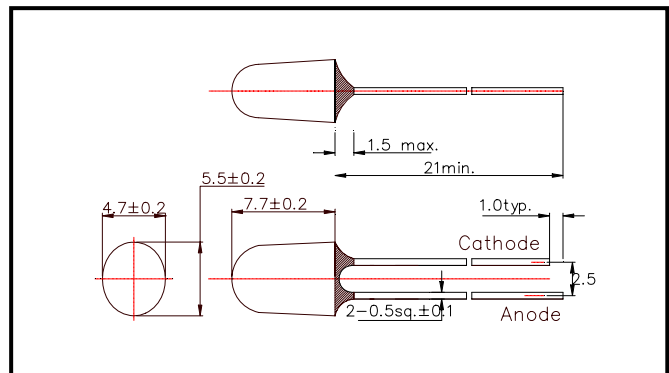

◆ Absolute Maximum Ratings

Item	Symbol	Maximum Rated Value	Unit	Ambient Temperature
Power Dissipation	PD	150	mW	Ta=25°C
Forward Current	IF	100	mA	Ta=25°C
Pulse Forward Current	IFP	1000	mA	Ta=25°C
Reverse Voltage	VR	5	V	Ta=25°C
Operating Temperature	TOPR	-30 ~ +85	°C	
Storage Temperature	TSTG	-30 ~ +100	°C	
Soldering Temperature	TSOL	260	°C	

‡ Pulse Forward Current condition: Duty=1% and Pulse Width=10us.

‡ Soldering condition : Soldering condition must be completed within 3 seconds at 260°C

◆ Electro-Optical Characteristics [Ta=25°C]

Item	Symbol	Condition	Minimum	Typical	Maximum	Unit
Forward Voltage	VF	IF=50mA DC		1.40	1.50	V
Pulsed Forward Voltage	VFP	IFP=1A		3.2	4.0	
Reverse Current	IR	VR=5V			10	uA
Total Radiated Power	PO	IF=50mA DC	18.0	20.0		mW
		IF=100mA, tp=20ms		40.0		
Radiant Intensity	IE	IF=50mA DC		50		mW/sr
		IF=100mA, tp=20ms		100		
Peak Wavelength	λP	IF=50mA DC	840	850	860	nm
Half Width	Δλ	IF=50mA DC		40		nm
Viewing Half Angle	long	θ 1/2	IF=50mA DC	±25		deg.
	short			±15		
Rise Time	tr	IF=50mA DC		15		ns
Fall Time	tf	IF=50mA DC		10		ns

‡ Total Radiated Power is measured by Photodyne #500

‡ Radiant Intensity is measured by Tektronix J-6512.

MUEVO-Vertrieb

Joseph-Mäurer-Straße 18 • 51688 Wipperfürth • Germany

+49 (0)2267 828 339 • Fax +49 (0)2267 829 175

sales@muevo-technics.com

